

TA-141 Single Head Mitre Saw (\varnothing :350 mm-13.77 in.)



Technical Features

- Power Supply: 400V, 3 ~, 50/60 Hz
- Total Power Output: 2.2 kW (2.94 hp)
- Saw Blade Diameter: \varnothing :350 mm (13.77 in)
- Saw Blade Speed: 2800 rpm (50 Hz), 3360 rpm (60 Hz)
- Air Pressure: 6-8 bar (90-120 psi)
- Air Consumption: 95 l/Min. (3.35 cfm)
- Maximum Profile Length: 3000 mm
- Machine Height: 1300 mm (51.18 in.)
- Machine Length: 800 mm (31.49 in.)
- Machine Width: 700 mm (27.55 in.)
- Machine Weight: 195 kg (430 lbs.)

* Consult factory for lengths and specifications not mentioned above.



195 kg



6-8 Bar




2.2kW

- For aluminum profiles cutting.
- Pneumatic saw blade feed from below with 350 mm (13.77 in.) saw blade diameter.
- The saw blade feed speed can be adjusted.
- Wide cutting angle range from 22.5° to 157.5° with special location points at 45°, 90° and 135°.
- Vertical pneumatic clamps ensure optimum profile clamping.
- Filter-Regulator-Lubricator for incoming air supply.
- Pulse spray mist blade lubricant system.

OPTIONAL

- Left and right roller stock conveyor system (TK 060)
- 3m (118.11 in.) Right hand roller stock conveyor & measuring stop (TK 061)
- 3m (118.11 in.) Left hand roller stock conveyor & measuring stop (TK 062)
- Automatic measuring and positioning system (MS 300)
- Hydro-Pneumatic System for aluminum profiles. (AH 041)

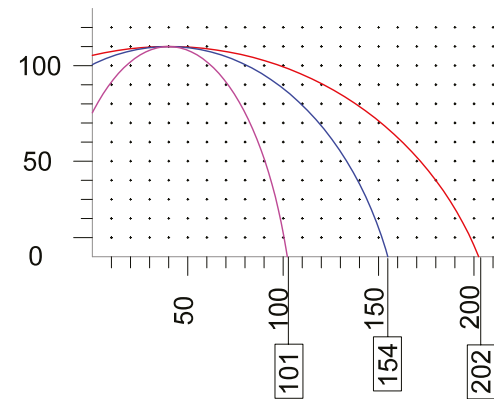

\varnothing 350 ■ 22,5° ■ 45° ■ 90°

