


**TT-352**  
**Double Mitre Saw (Ø 350 mm)**



## TT-352

### Double Mitre Saw (Ø 350 mm)

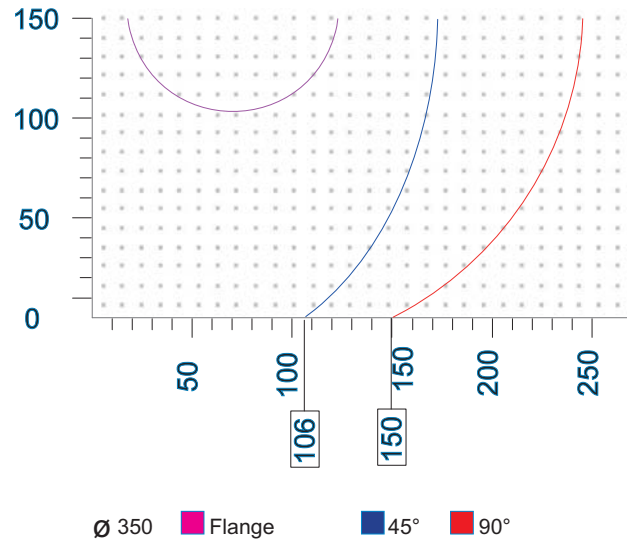

#### Technical Features

- Power Supply: 400 V, 3~50-60 Hz
- Total Power Output: 2,2 kW
- Air Pressure: 6-8 bar
- Air Consumption: 120 l/min.
- Spindle Speed: 2800 rpm
- Max. Profile Length: 3700 mm
- Min. Profile Length: 410 mm
- Machine Height (Including Display): 1750 mm
- Machine Length: 4500 mm
- Machine Width: 1050 mm
- Machine Weight: 425 kg



425 kg



6-8 bar



2,2 kW

- PVC profiles cutting with 350 mm saw blade diameter.
- The movable head can be manually positioned at the desired length by controlling the digital display and pneumatically fixed.
- Standard equipped with digital measuring system.
- Pivoting range from 45° to 90° left and right provide to work both internal and external dimensions. The pivoting range can be infinitely adjusted and fixed by manual clamping.
- Vertical pneumatic clamps ensure optimum profile fixing.
- Location points at  $\pm 60^\circ$ ,  $\pm 67,5^\circ$ , and  $\pm 75^\circ$  ease to adjust the head at most common angles.
- The saw blade feed speed can be adjusted.
- Protective covers increase working safety.

